

**Specifications - Dayliter Model MSF
(Metal Self Flashing)**

Skylights shall be thermally broken self flashing Dayliter model #MSF _____ as manufactured by Dayliter Skylights in Langley, BC, Canada. The skylight base frame shall be a triple hollow (frost free) rigid vinyl extrusion with all corners fusion welded to ensure a watertight frame. The vinyl base frame shall include a minimum 3 inch aluminum roof flange. The factory assembled units shall include an aluminum retainer cap (T6063) in (black) (white) powder coated baked enamel paint finish. The skylight shall be fastened together with stainless steel screws penetrating the side of the skylight.

Glazing materials shall be (double) (triple) acrylic plastic (dome) (Barrel-lite) (Flat-lite) (Ridgelite) (pyramid) in (clear) (bronze) (white) with a uniform air space between the domes and a perimeter moisture flange (*no-leak guarantee*) stretch formed into the top (acrylic) (polycarbonate) layer to eliminate water penetration.

The condensation gutter with weep holes in all four corners shall be an integral part of the unit.


Standard and Custom Sizes are available.



Dayliter MSF Dome (shown in translucent white acrylic)



Dayliter MSF Flat Top Pyramid (shown in bronze acrylic)

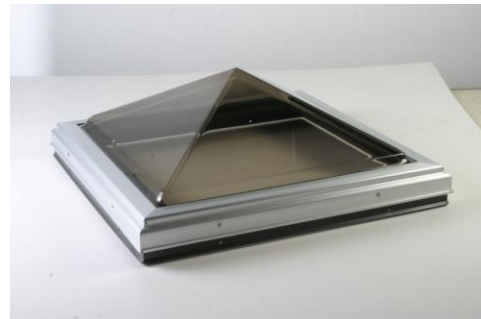

Dayliter Pyramid (shown in bronze acrylic on ATCM frame)

Model Number	Inside Curb Rough Opening
2028 (1 X 2)	14.5 X 22.5
2036 (1 X 3)	14.5 X 30.5
2040 (1 X 3)	14.5 X 34.5
2052 (1 X 4)	14.5 X 46.5
2428 (1.5 X 2)	18.5 X 22.5
2828 (2 X 2)	22.5 X 22.5
2836 (2 X 2.5)	22.5 X 30.5
2840 (2 X 3)	22.5 X 34.5
2852 (2 X 4)	22.5 X 46.5
2864 (2 X 5)	22.5 X 58.5
2868 (2 X 5.5)	22.5 X 62.5
2876 (2 X 6)	22.5 X 70.5
28100 (2 X 8)	22.5 X 94.5
3636 (2.5 X 2.5)	30.5 X 30.5